


Bicycle Inner Tube

INSTALLATION INSTRUCTIONS

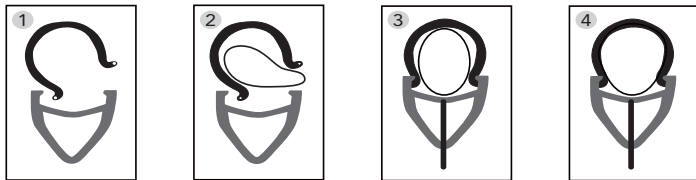

Before installing your new SERFAS tube, inspect both the outside and inside of tire and remove any foreign objects that may cause flats. Check inside of rim to make sure all spoke heads or sharp edges are covered or filed smooth.

DO NOT USE SCREWDRIVER OR SHARP TOOL TO INSTALL TUBE.
Tire levers are recommended.

- 1 Insert one side or bead of tire into rim.
- 2 Place partially inflated tube inside tire casing and straightened valve stem.
- 3 Starting at the valve stem, push second bead onto rim.
- 4 Inflate tire to recommended pressure noted on tire and test beads for integrity.